



nFUSE® 6x4 P Light



Extremely functional and customizable to get the job done

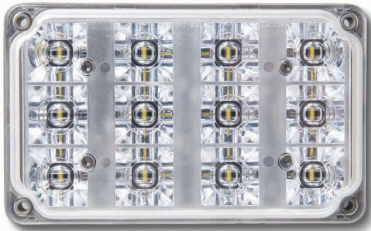

Warning

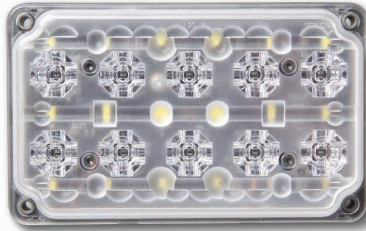

Backup With Warning



Stop/Tail/Turn and Turn

LENS COLOR OPTIONS



FEATURES

Multiple heavy-duty metal bezels available

- Powerful lighting output perfect for fire and EMS apparatuses
- Available for use as backup, backup with warning, stop/tail/turn, turn and warning
- Lens available in clear, red, blue, green and amber
- Traditional polycarbonate lens
- Rugged, weather-resistant IP67 enclosure
- Industry standard bolt pattern location
- LED available in single, dual or split colors

SPECIFICATIONS

Input Voltage Range	9-32 Vdc
Amperage Draw	Red - 1.55 amps (peak), 0.78 amps (average) Amber, blue, green or white - 1.9 amps (peak), 0.95 amps (average)
Wattage	19.8 to 24.3 Watts
Operating Temperature	-40°C to +85°C
LED Color Capabilities	All standard single, dual or split color warning, red stop/tail, amber turn, white backup or white backup with amber, blue, green, red or white warning
LED Color Options	● ● ● ● ○
Flash Patterns	15
Dimensions	6.4" L x 3.9" H x 1.0" D
Mount Types	Stud or screw mount
Certifications	SAE J595, CA Title 13, NFPA 1901, KKK-1822-F, FMVSS-108 <i>* See installation sheet for complete list of certifications per light, colors and flash patterns</i>



Scan to order
or learn more

Refer to soundoffsignal.com for standard part numbers and complete offerings.

CONTACT

Toll free 800.338.7337
Direct 616.896.7100
soundoffsignal.com

PO Box 206
Hudsonville, MI 49426
customerservice@soundoffsignal.com

V0623