

UltraLITEplus LED Exterior Directional Warning Bar with Arrow Ends

New addition to our UltraLITEplus product line!

Six module arrow heads provide direct, visual communication to oncoming traffic.



Directional Warning Bar with Arrow Ends

Choose from two harness lengths


12 Module, Arrow Ends (6 modules each side), Amber
15 foot harness **EL3PA12A00A**

12 Module, Arrow Ends (6 modules each side), Amber
25 foot harness **EL3PA12A01A**

INPUT VOLTAGE RANGE	10-16 Vdc
CURRENT DRAW	10 Amps Peak, 5 Amp avg. with 50% duty cycle flash pattern
FLASH PATTERNS	Warning, arrow or default
OPERATING TEMPERATURE	-40° C to +85° C
DIMENSIONS	
Length	51.75" (131.45 cm)
Height	21.5" (54.6 cm)
Depth	1.5" (3.8 cm)
MOUNTING	Attachment brackets (included)
WARRANTY	Five-year

Back Rack bracket kit now available!

Mounting bracket attaches back of arrow to cross bar of the Back Rack.
Kit includes two mounting brackets and hardware. Light and Back Rack sold separately.

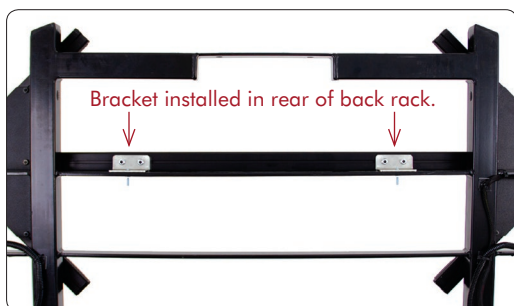

PUL3BRM



Close-up

Contact your sales representative for additional information.