


# nFUSE® 7x3 P Light



Extremely functional and customizable to get the job done

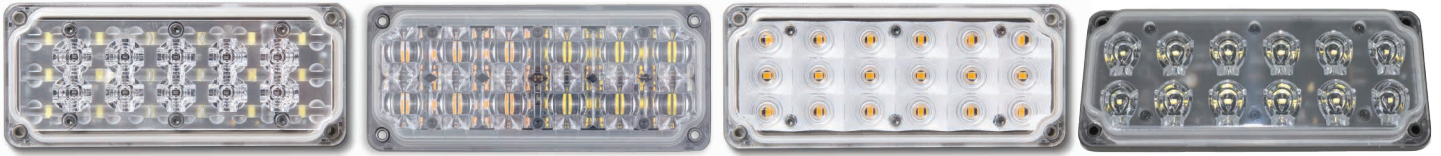

Backup With Warning

Warning

Stop/Tail/Turn and Turn

Scene

## LENS COLOR OPTIONS



Multiple heavy-duty metal bezels available  
**NOW AVAILABLE IN SCENE FUNCTION!**

## FEATURES

- Powerful lighting output perfect for fire and EMS apparatuses
- Available for use as backup, backup with warning, scene, stop/tail/turn, turn and warning
- Lens available in clear, red, blue, green and amber
- Traditional polycarbonate lens
- Rugged, weather-resistant IP67 enclosure
- Industry standard bolt pattern location
- LED available in single, dual or split colors

## SPECIFICATIONS

<b>Input Voltage Range</b>	9-32 Vdc
<b>Amperage Draw</b>	Red - 1.55 amps (peak), 0.78 amps (average) Amber, blue, green or white - 1.9 amps (peak), 0.95 amps (average)
<b>Wattage</b>	19.8 to 24.3 Watts
<b>Operating Temperature</b>	-40°C to +85°C
<b>LED Color Capabilities</b>	All standard single, dual or split color warning, red stop/tail, amber turn, white scene, white backup or white backup with amber, blue, green, red or white warning
<b>LED Color Options</b>	● ● ● ● ○
<b>Flash Patterns</b>	15
<b>Dimensions</b>	7.25" L x 3.1" H x 1.0" D (18.41cm L x 7.87cm H x 2.54cm D)
<b>Mount Types</b>	Stud or screw mount
<b>Certifications</b>	SAE J595, CA Title 13, NFPA 1901, KKK-1822-F, FMVSS-108 <i>* See installation sheet for complete list of certifications per light, colors and flash patterns</i>



Scan to order  
or learn more

Refer to [soundoffsignal.com](http://soundoffsignal.com) for standard part numbers and complete offerings.

## CONTACT

Toll free 800.338.7337  
Direct 616.896.7100  
[soundoffsignal.com](http://soundoffsignal.com)

PO Box 206  
Hudsonville, MI 49426  
[customerservice@soundoffsignal.com](mailto:customerservice@soundoffsignal.com)

V0623